EMC

Exam E20-690

VNX Solutions Specialist Exam for Platform Engineers

Verson: Demo
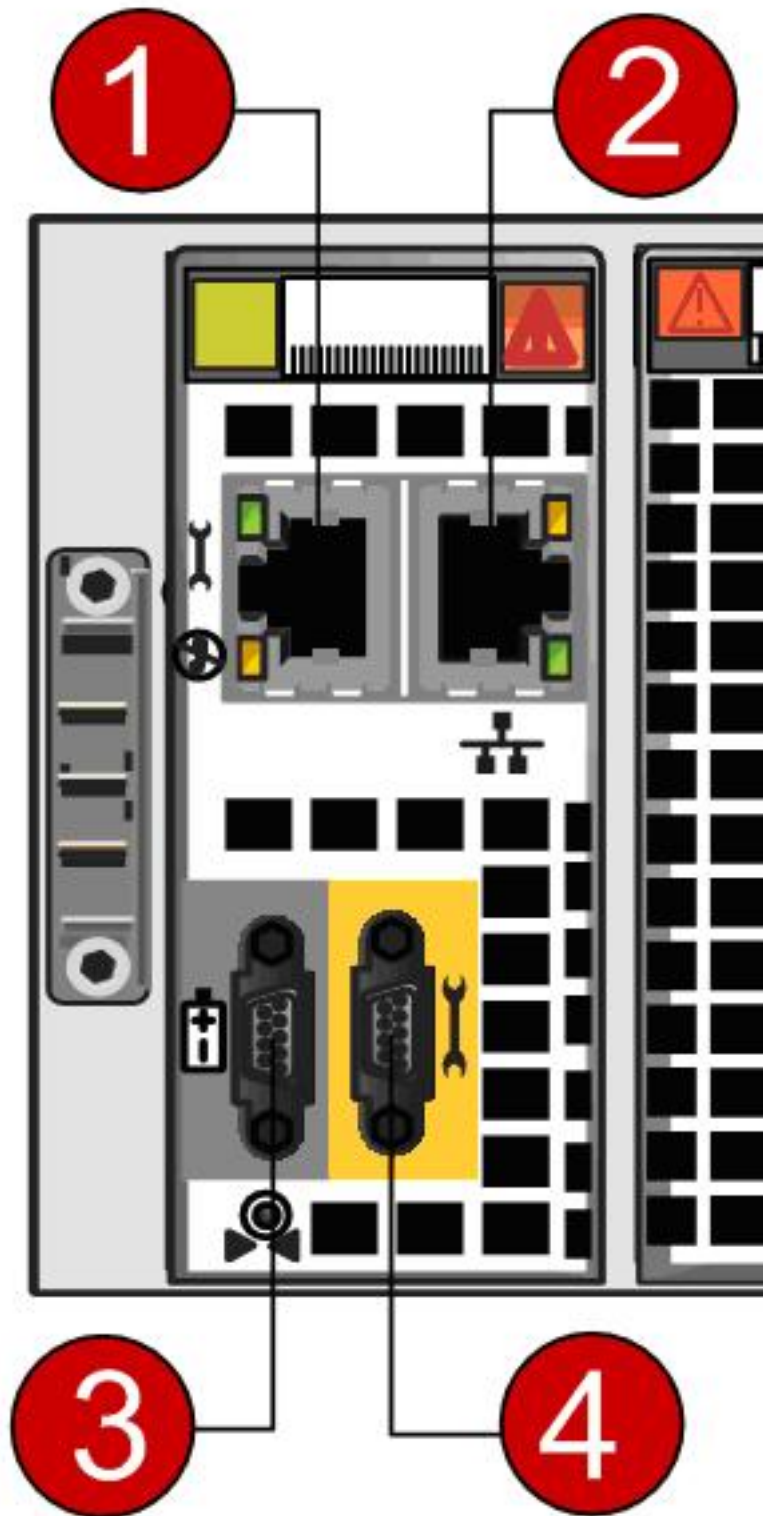
[Total Questions: 10]

Question No : 1

You are installing an ESRS IP Client to monitor a VNX Block array. You also want to connect remotely to SP A and SP B over the ESRS platform. What needs to be done first?

A. Add the ESRS workstation IP address to the RemotelyAnywhere access restriction list on the array's SP A or SP
B. Add the SP A and SP B IP addresses to the ESRS workstation host file.
C. Add the ESRS workstation IP address to the administration access restriction list.
D. Add the SP A and SP B IP addresses to the RemotelyAnywhere access restriction list on the array's SP A or SP

Answer: A

Question No : 2

Refer to the exhibit.

The engineer needs to manage a VNX system during an unplanned data center outage but the network is down. Which connection(s) on the SPE management module can be used?

A. 1 or 2
B. 4 only
C. 1 or 4

D. 2 only

Answer: C

After which step during an NDU upgrade can the process no longer be aborted?

A. After the primary SP Reboot/Restart step
B. After the NDU process step for committing the new NDU Bundle
C. After existing package files are uninstalled from both SPs
D. After directories for the upgrade package are deleted

Answer: A

In a VNX File procedure, which component is imaged back to a state where the VNX Installation Assistant can be rerun?

A. Control Station
B. Control LUNs
C. NAS partitions
D. Data Movers

Answer: A

What is the VNX default failover policy for a Data Mover?

A. Auto
B. Manual
C. Retry
D. Verify

Answer: A

Question No : 6

What can cause an SP to go into degraded mode?

A. Image-SP type mismatch
B. Failed power supply
C. Multiple unowned LUNs
D. Failed SLIC

Answer: A

Question No : 7

Which describes the VNX Control Volumes?

A. Private system LUNs where the EMC NAS code is installed
B. Control LUNs that the Unisphere Host Agent uses to manage the array
C. Volumes that AVM manages and that store NAS file systems
D. Partitions containing the VNX OE for Block operating system

Answer: A

Question No : 8

You are installing ESRS IP client to monitor a VNX5700 File system.

Your customer has asked you to monitor an additional array. Which other array is supported during installation?

A. VNX Block
B. VBLOCK
C. VMAX
D. VPLEX

Answer: A

Question No : 9

While at a customer's site, you need access to a VNX Storage Processor on IP address 10.11.12.13. You want to use RemotelyAnywhere but https://10.11.12.13 does not open the login screen.

Which port needs to be added to the URL?

A. 9519
B. 443
C. 80
D. 119

Answer: A

Question No : 10

You are tasked with running CLI commands. You discover that SPB is responsive, but SPA is in a degraded mode. If running commands from SPB, what is the function of the speclcli - issuePeerNMIcommand?

A. Triggers a panic dump on SPA
B. Triggers a panic dump on SPB
C. Display the startup progress on SPA
D. Display the startup progress on SPB

Answer: A